

27 811 980 Product version from 9/1/2025



Fits: IMO, MEM, CL.1, CYO

- COMPACT RAIN, max. flow rate 15 l/min (at 3 bar)
- Function from: 5 l/min
- inherently safe from back flow
- with anti-scale system
- metal shower hose 1250mm with integrated anti-twist protection

technical data:

- rosette for wall elbow 60 x 60mm
- rosette for shower holder 60 x 60mm
- 1/2" wall elbow
- 3/8" shower outlet

Notes:

	Brushed Platinum	27 811 980-06
	Chrome	27 811 980-00
	Platinum	27 811 980-08
	Dark Chrome	27 811 980-19
	Light Gold (PVD)	27 811 980-26
	Brushed Light Gold (PVD)	27 811 980-27
	Brushed Durabronze (23kt Gold)	27 811 980-28
	Matte Black	27 811 980-33
	Brushed Gold (PVD)	27 811 980-37
	Brushed Dark Brass (PVD)	27 811 980-39
	Brushed Bronze (PVD)	27 811 980-42
	Brushed Champagne (22kt Gold)	27 811 980-46
	Champagne (22kt Gold)	27 811 980-47
	Brushed Chrome	27 811 980-93
	Brushed Dark Platinum	27 811 980-99

Recommended miscellaneous




Concealed wall elbow -

35 085 970 90

- min. recess depth 90 mm
- max. recess depth 163 mm

27 811 980 Product version from 9/1/2025

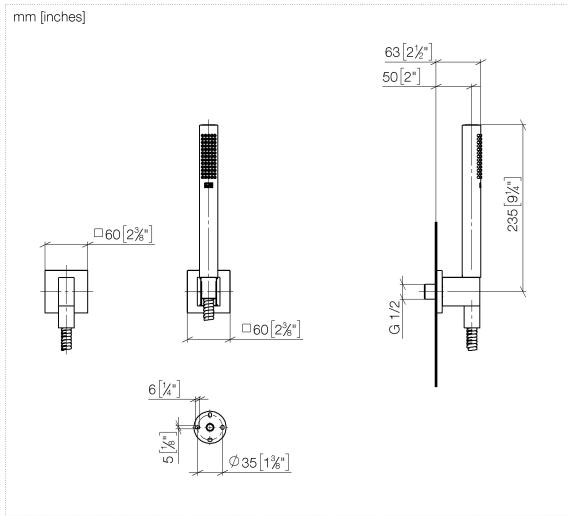

Flow rate chart



Codes & Standards

EN 1717




Hand shower set with individual rosettes - Brushed Platinum

SERIES SPECIFIC

27 811 980 Product version from 9/1/2025

Certificates and sustainability

Belgaqua_25-344-2

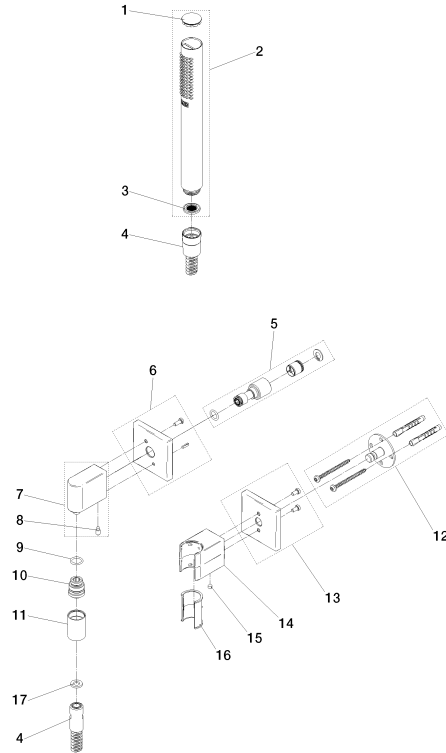

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time	
	11	90 21 02 069 00-06	cover	1.00	10
	1	09 21 02 170-06	cap	1.00	10
	5	90 24 03 116 20 90	nipple	1.00	2
	16	09 18 40 078 90	sleeve	1.00	2
	8	09 31 11 005 90	pin	1.00	2
	9	90 14 10 077 00 90	seal	1.00	2
	15	90 31 11 112 00 90	pin	1.00	2
	17	90 14 20 026 00 90	seal	1.00	2
	3	09 23 01 039 90	sieve	1.00	2
	4	90 30 02 072 00-06	Metal shower hose 1/2" x 3/8" x 1250 mm - Brushed Platinum	1.00	10
	13	90 27 98 055 00-06	rosette	1.00	10
	12	90 30 11 041 00 90	disc	1.00	2
	2	90 12 11 140 40-06	shower	1.00	10
	6	90 27 82 017 00-06	rosette	1.00	10
	10	09 24 03 107 20 90	nipple	1.00	2
	14	90 18 02 005 01-06	holder	1.00	10
	7	90 11 03 046 00-06	connection	1.00	10