

35 521 970 90



- red brass, lead-free
- 2x back flow preventer
- 2x female thread 3/4" connections
- 1x female thread 3/4" outlet for additional valves
- 2x female thread 3/4" outlet, right/left alternatively
- 3x dust cover
- 3x anti-water packing
- soundproofing
- gauge 120 mm
- suitable for xGRID (when using installation track + 12 mm recess depth)
- WRAS

Recommended miscellaneous

Extension 28 mm -

12 177 970 90



Recommended miscellaneous


Extension 46 mm -

12 178 970 90



Recommended miscellaneous

Drybox Thermostat module with 2 valves - 39 521 970 90
 • Overflow is part of the scope of delivery.



Recommended miscellaneous

xGRID Attachment set for integrating in the dry wall construction - 12 340 970 90




Required miscellaneous

xGRID Installation track 555 mm - 12 360 970 90



35 521 970 90

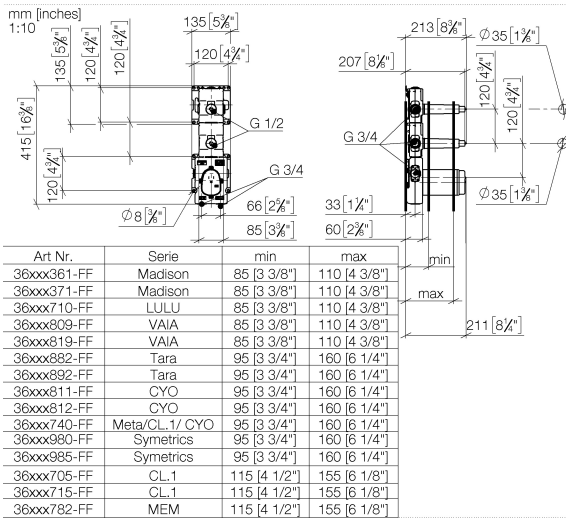

Codes & Standards

EN 1111

EN 1717

Scottish Water
Byelaws

UK Water Supply
Regulations

XP P 41-280

Certificates and sustainability

Belgaqua_21-031-2 WRAS_2011

ACS_21 ACC LY

DVGW_DW-
6512DN0


Belgaqua_25-343-2

EPD-DOR-20230287

-IBA1-EN

Environmental.prod
uct-declarat

35 521 970 90

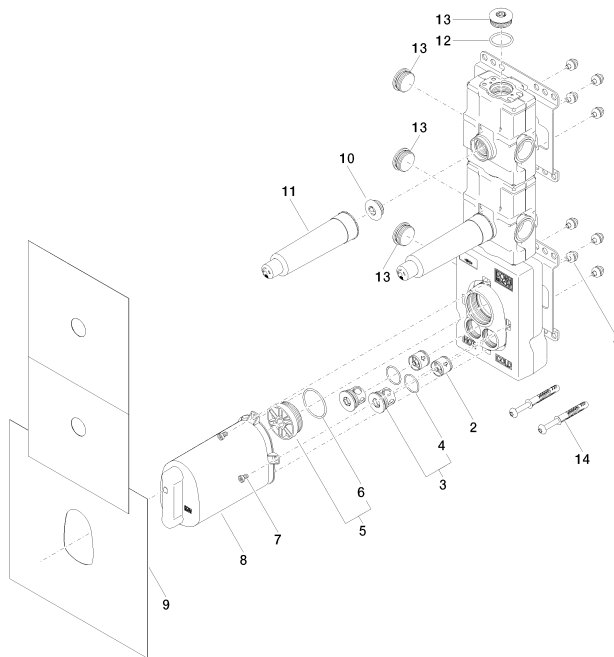

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
5	04 31 20 100 00 90	plug	1.00	2
10	04 31 20 006 00 90	plug	2.00	2
3	04 21 34 077 00 90	nipple	2.00	2
14	04 30 31 054 00 90	fixing set	2.00	2
13	09 31 20 003 90	plug	4.00	2
1	90 23 01 091 00 90	set	8.00	2
4	09 14 10 098 90	seal	2.00	2
12	09 14 10 009 90	seal	1.00	2
2	90 23 01 045 00 90	back-flow preventer	2.00	2
6	09 14 10 111 90	seal	1.00	2
8	04 21 02 174 01 90	cap	1.00	2
9	04 14 03 073 06 90	gasket kit	1.00	2
11	90 21 02 190 00 90	cap	2.00	2
7	09 30 30 169 90	screw	4.00	2